

Schlüter®-BARA-FAP

Finishing profile
covering profile for balcony perimeters

5.23

Product data sheet

Application and Function

Schlüter-BARA-FAP is a 160 mm high profile with drip-lip made of colour coated aluminium. It is designed to cover the exposed perimeters of cantilevered balconies. Depending on the properties of the exposed perimeter, the profile can be adhered with the adhesive Schlüter-KERDI-FIX or attached mechanically.

Schlüter-BARA-FAP can be combined with all profiles of the Schlüter-BARA product family and is available in the same colours. We recommend the joint cover Schlüter-BARA-STU as a connector.


Material

The profile is available in the following material version:
AC = colour coated aluminium

Material properties and areas of application

The profile is made of colour coated aluminium. The coating of the aluminium profile is colour stable as well as UV- and weather resistant.

Visible surfaces should be protected against abrasion. In special cases, the suitability of the profile must be verified based on the anticipated chemical and mechanical stresses.

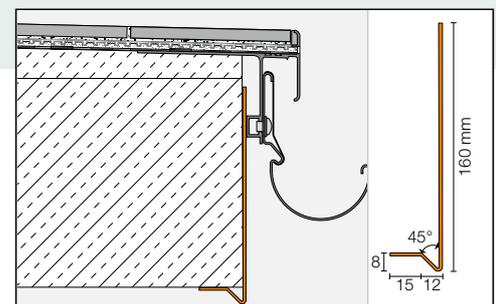



Installation

1. Place the horizontal leg of the product flush on the concrete slab.
2. Depending on the properties of the exposed perimeter, it can be adhered with the adhesive Schlüter-KERDI-FIX or attached mechanically.

Note:

Substrates on which the profile is to be installed need to be evaluated for their stability. Prior to the use of Schlüter-KERDI-FIX, all components of the surface that may weaken the bond must be removed. If that is not an option, use anchors and screws for additional mechanical attachment.

If screw attachment is necessary, position the screws in the top area of the profile. They can then be covered with an edge profile of the Schlüter-BARA product family.

To avoid vibrations in the screw attached option, additional adhesion is recommended in the lower section.

Note: About the profile ends of BARA-FAP at a distance of approx. 5 mm and cover with the Schlüter-BARA-STU joint covering strip. To avoid vibrations when screwed in place, additional adhesion is recommended in the lower section.

Notes

The profile requires no special maintenance or care. The powder coated surface of the aluminium profile is UV resistant and colour stable. Damaged visible surfaces can be restored with paint.

Product Overview

Schlüter®-BARA-FAP

Colours: BW = brilliant white, GM= metallic grey, HB = light beige, SB = black brown

Supplied length: 2.50 m

Colours	BW	GM	PG	SB
Profile	•	•	•	•
90° external corner	•	•	•	•

Note: We recommend the joint cover Schlüter®-BARA-STU as a connector.



external corner: Schlüter®-BARA-FAP/E 90°

Schlüter-Systems KG | Schmölestraße 7 | D-58640 Iserlohn

+49 2371 971-0 | +49 2371 971-1111 | info@schluter.de | schluter-systems.com

Schlüter-Systems Ltd | Units 3-6 Bardon 22 Industrial Estate | Bardon Hill | Coalville | Leicestershire | LE67 1TE

+44 (0) 1530 813396 | sales@schluter.co.uk | schluter.co.uk