

Schlüter®-DILEX-MP/-MPV

Movement joint profile
for screed bed applications

4.3

Product data sheet



Application and Function


Schlüter-DILEX-MP is a profile made of rigid PVC and soft CPE that adjusts to the assembly height of the surface covering by attaching the Schlüter-DILEX-MPV extension profile. The profile system is suitable for the creation of expansion joints in floor coverings made of ceramic tile, natural stone, brick or synthetic pavers over screed mortar beds. The profile separates the individual covering sections and equalises compression stresses in its centre segment of soft CPE. Expansion stresses that may occur cannot be absorbed, as the profile does not have lateral anchoring in the screed mortar bed.

The lateral edges of the rigid PVC profile, which are covered by a soft CPE movement zone of approximately 1 mm at the top, protect the edges of adjoining covering materials from minor mechanical impact, e.g. in residential settings, offices or sales rooms.

Schlüter-DILEX-MP may also be inserted in saw cut joints or wider cut joints, e.g. in the case of renovations. The remaining joint between the tile and the profile must be filled completely with grout or epoxy.

Material


Schlüter-DILEX-MP consists of recycled rigid PVC side sections that feature dove-tailed anchoring ribs, connected at the top by a soft CPE movement zone. The Schlüter-DILEX-MPV extension profile is made of recycled rigid PVC.

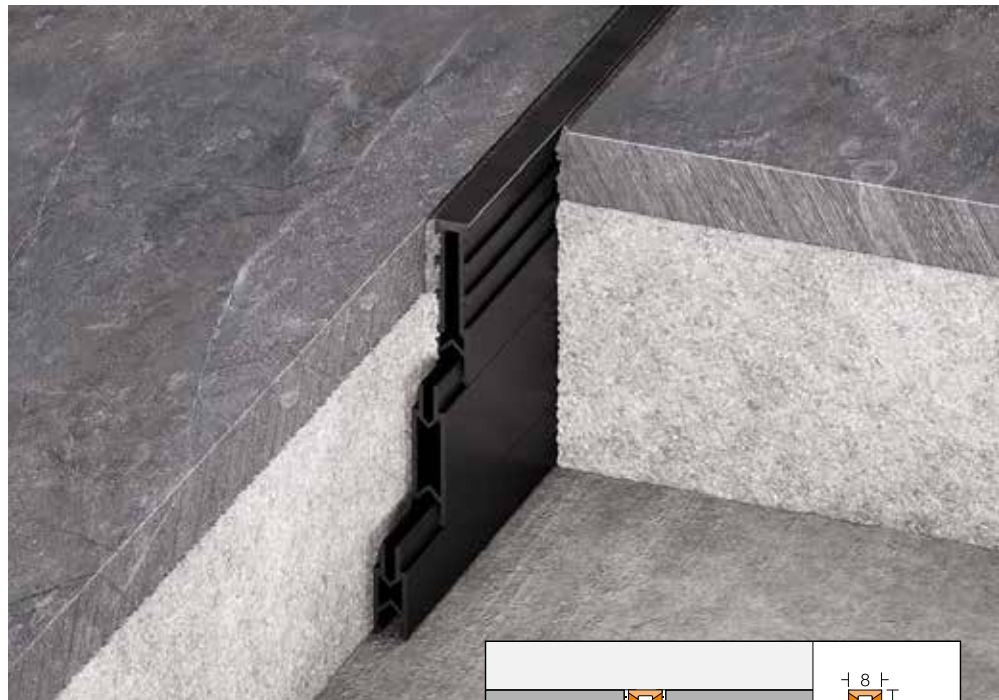

Material properties and areas of application

The profile is resistant to most chemicals encountered in tiled environments.

In special cases, the suitability of a proposed type of material must be verified based on the anticipated chemical, mechanical and/or other stresses. The CPE movement zone of the profile is UV resistant and plasticizer free. Schlüter-DILEX-MP / -MPV creates a movement joint in tiled surfaces set into a mortar bed. Individual covering fields are separated by the profile whose soft CPE movement zone equalises respective compressive stresses.

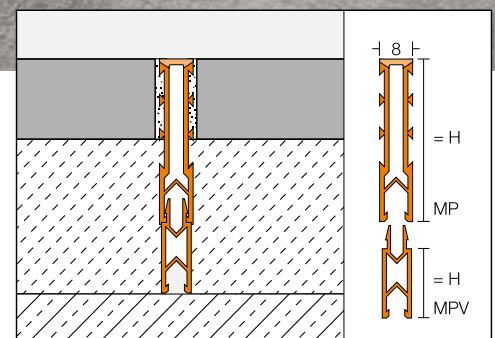



Installation

1. Adjust the required profile height according to design height by attaching snap-on extensions (Schlüter-DILEX-MPV).
2. Set the profile flush against the edge of completed covering segments. The lateral profile parts must be solidly embedded in the mortar.
3. Install the surface of the adjacent tile covering flush against the profile and solidly embed the profile.
4. Fill the remaining joint space between the profile and the covering completely with grout.

Installation note on joint repair: Insert or tap the profile into the appropriately prepared joint chamber and fill the joint space between the profile and the covering completely with grout, epoxy, or dry-set mortar.

Maintenance

Schlüter-DILEX-MP is resistant to fungi and bacteria and requires no special maintenance. Clean the profile along with the tiled surface using common household cleaning agents.

Application areas depending on local traffic load



Foot traffic

Total weight –



Shopping carts

Total weight max. 0.4 t



Cars

Total weight max. 3.5 t

● Suitable

● Unsuitable

Movement capacity

DILEX-MP	2 mm

Product Overview

Schlüter®-DILEX-MP

Colours: G = grey, HB = light beige,

GS = graphite black

Length supplied: 2.50 m

Colours	G	HB	GS
H = 35 mm	●	●	●

Schlüter®-DILEX-MPV

Mortar bed profile extension

Length supplied: 2.50 m

Height	MPV
H = 15 mm	●
H = 25 mm	●

Schlüter-Systems KG Schmölestraße 7 | D-58640 Iserlohn

+49 2371 971-0 +49 2371 971-1111 info@schlueter.de schlueter-systems.com

Schlüter-Systems Ltd Units 3-6 Bardon 22 Industrial Estate | Bardon Hill | Coalville | Leicestershire | LE67 1TE

+44 (0) 1530 813396 sales@schluter.co.uk schluter.co.uk