Environmental Product Declaration

In accordance with ISO 14025:2006, EN 15804+A2:2019/AC:2021
and ISO 21930:2017 for:

Schlüter®- DITRA-HEAT-DUO PS Waterproofing and Uncoupling Membrane

from

Schlüter-Systems KG

Programme:	The International EPD System, www.environdec.com
Programme operator:	EPD International AB
Type of EPD:	EPD of a single product from a manufacturer
EPD registration number:	EPD-IES-0032676:001
Version date:	2026-06-18
Validity date:	2031-06-17

An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com

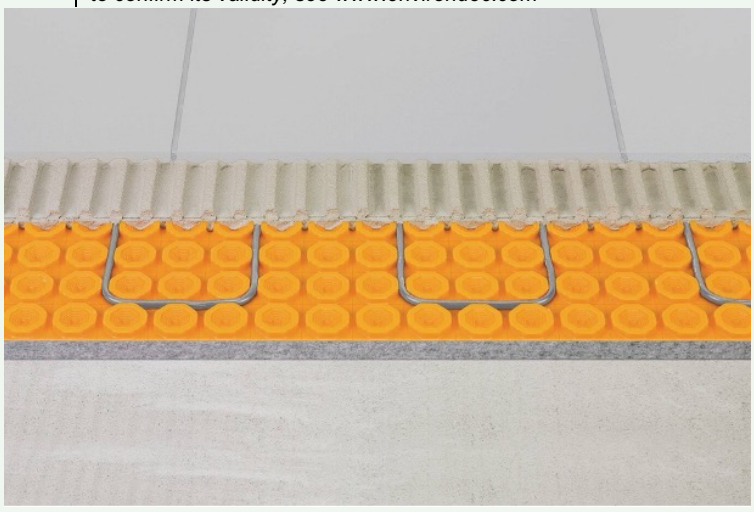

GENERAL INFORMATION

Programme Information	
Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	support@environdec.com

Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)[1]
Product Category Rules (PCR): Construction Products PCR 2019: 14, Version 2.0.1
PCR review was conducted by: The Technical Committee of the International EPD System. A full list of members is available on www.environdec.com. The review panel may be contacted via support@environdec.com. Rob Rouwette (chair), Noa Meron (co-chair)

Third-party Verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: ☒ **Individual EPD verification without a pre-verified LCA/EPD tool** Third-party verifier: James Mellentine, Thrive ESG Approved by: International EPD System
Procedure for follow-up of data during EPD validity involves third party verifier: ☐ Yes ☒ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterisation factors); and be valid at the time of comparison.
For further information about comparability, see EN 15804 and ISO 14025.

INFORMATION ABOUT EPD OWNER

[1] This EPD is based on a PCR that satisfies procurement rules at the federal, state, and municipal levels which call for EPDs based on the Construction Products PCR 2019: 14, Version 2.0.1. The Construction Products PCR 2019: 14, Version 1.3.4 was used to meet regulatory (example: Buy Clean California Act, etc.) and market expectations (example: Building Transparency EC3 comparisons, LEED and existing vendor procurement requirements, product scoring programs, etc.). The EPD should not be used outside of this context.

Owner of the EPD: Schlüter-Systems
Address: Schlüter-Systems KG
Schmölestraße 7
D-58640 Iserlohn
Contact: Björn Spiegel [itn@schlueter.de]
Description of the organisation: Schlüter-Systems has its headquarters in Iserlohn, Germany. In Europe, there are also subsidiaries in France, Italy, Spain, Turkey, and England. Many other countries are served by sales representatives. In North America, Schluter Systems has four locations: Plattsburgh, New York; Reno, Nevada; Dallas-Fort Worth, Texas; and Montréal, Québec. Schlüter-Systems KG is dedicated to creating innovative solutions for the tile industry, and working closely with its network of distributors, dealers, tile contractors, architects, specifiers and other members of the building and construction industry.

PRODUCT INFORMATION

Product name: DITRA-HEAT-DUO-PS
Product identification: CSI division 09 30 00
Visual representation of the product:

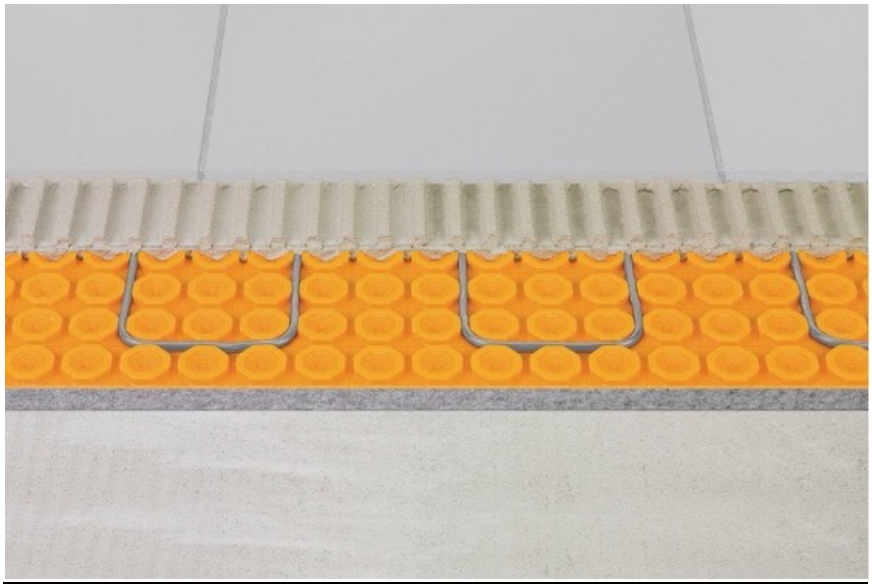

UN CPC code: UN CPC: 54699
Product description: DITRA-HEAT-DUO PS is a polypropylene membrane featuring a 2mm special anchoring fleece on the underside, as well as a layer of adhesive for easy installation without the use of mortar or other external adhesives. DITRA-HEAT-DUO PS reduces impact sound and enables a faster heat-up response for installed heating cables, which function separately from the product. DITRA-HEAT-DUO PS is a universal substrate for tile and stone coverings, which serves as an uncoupling, crack bridging, waterproofing, vapor pressure equalization layer and is designed for the attachment of DITRA-HEAT-E-HK heating cables.
Name and location of production site(s): North Rhine-Westphalia, Germany

Parameter	DITRA-HEAT-DUO PS Waterproofing and Uncoupling Membrane
Width [m]	0.98
Length [m]	0.8 – 10.2
Thickness [mm]	7.6

Parameter	DITRA-HEAT-DUO PS Waterproofing and Uncoupling Membrane
Water vapor retardant (sd)	124.2
Reaction to fire (EN 13501-1)	Euroclass E
Water tightness	Watertight
ANSI A118.10	Comply
ASTM E96 Vapor Management [perms]	0.48

CONTENT DECLARATION

Product content	Mass, kg	Post-consumer recycled material, mass-% of product	Biogenic material, mass-% of product	Biogenic material, kg C/product or declared unit
Polypropylene	9.39E-01	0%	0%/0	0
Colorant	1.25E-02	0%	0.64%	0.00008
PET	5.78E-02	0%	0%	0
PS Adhesive	1.91E-01	0%	0%	0
TOTAL	1.20E+00	0%	0.64%	0.00008

Ancillary Materials	Weight, kg	Weight-% (versus the product)	Biogenic material, mass-% of product	Biogenic material, kg C/product or declared unit
Black ink	1.73E-05	0%	0%	0
TOTAL	1.73E-05	0%	0%	0

Packaging materials	Mass, kg	Mass-% (versus the product)	Biogenic material, kg C/product or declared unit
Wood pallet	7.86E-02	6.55%	9.43E-03
Cardboard	2.82E-02	2.35%	1.12E-02
LDPE Bags	6.77E-03	0.56%	0.00E+00
Paper Labels	6.73E-05	0.06%	2.95E-04
HDF Board	3.01E-04	0.03%	0.00E+00
PET Film	6.38E-07	0.0001%	0.00E+00
PS Backing Protective Film	2.36E-01	19.65%	0.00E+00

TOTAL	3.50E-01	29.19%	2.09E-02

1 kg biogenic carbon in the product/packaging is equivalent to the uptake of 44/12 kg of CO_2.

No substances included in the Candidate List of Substances of Very High Concern for authorization under REACH Regulations are present in Schluter Systems membranes, either above the threshold for registration with the European Chemicals Agency or above 0.1% (wt./wt).

LCA INFORMATION

Declared unit: One (1) m^2 of uncoupling membrane for the reference service life of 75 years.
Conversion factor to mass: 1.20kg per declared unit
Reference service life: 75 years
Time representativeness: 2024
Geographical scope: Asia and Europe (A1); Germany (A3); Europe and North America (A4-A5, B1-B7, C1-C4, D)
Database(s) and LCA software used: Sphera Managed LCA Content (fka GaBi) 2024.2; Sphera LCA for Experts (fka GaBi) 10.9.1.10
Description of system boundaries: Cradle to gate with options, modules A4-A5, modules B, modules C1-C4, and module D.
Process flow diagram:

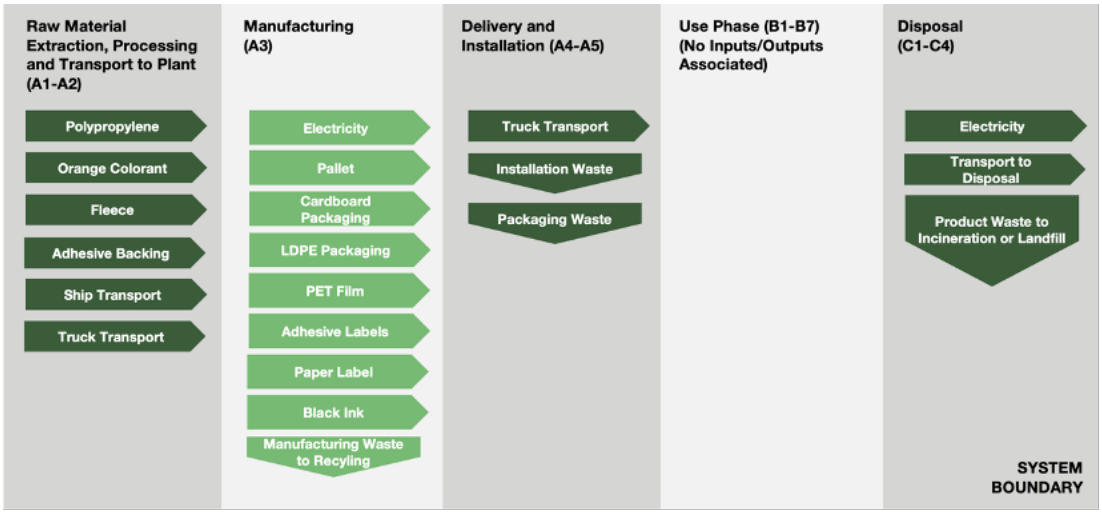

Manufacturing:
The polypropylene granulate is homogenized with the orange colorant in an extruder and heated to the required processing temperature. The resulting melt is then extruded through a slot die directly onto a three-dimensional forming line. The mat is then formed in a vacuum molding process and bonded to the 450-gram fleece and adhesive backing in a thermally heated state.

Electricity:
Energy resources used in the manufacturing process are accounted for in the model. The electricity is sourced from the power grid, and no onsite electricity generation is used. Regional residual grid mix datasets from MLC are used to assess the generation, distribution, and transmission of electricity. No other energy resources are used. Details on the electricity mix used for manufacturing are as follows:

Source	Quantity [%]	GWP-GHG [kg CO2-eq/kWh]
Natural gas	21%	0.731

Hard coal	21%	
Nuclear	18%	
Lignite	35%	
Heavy fuel oil	1%	
Renewables	2%	

Cut-Off Criteria:
Cumulative excluded material inputs, energy inputs, and environmental impacts must not exceed 5% based on total weight, energy use, or environmental impact of the declared unit. Inputs or outputs greater than 1% (based on total mass of the final product) were included within the scope of analysis. Material inputs less than 1% were included if sufficient data was available to warrant inclusion and/or the material input was thought to have significant environmental impact. Cumulative excluded material inputs and environmental impacts are less than 5% based on total weight and impact of the declared unit. The list of excluded inputs include:

- As the tools used during the installation of the product are multi-use tools and can be reused after each installation, the per-declared unit impacts are considered negligible and therefore are not included.
- Some material and energy inputs may have been excluded within the MLC datasets used for this project. All MLC datasets have been critically reviewed and conform to the exclusion requirements of the PCR.

Allocation:
General principles of allocation were based on ISO 14040/44. There are other products produced at the manufacturing facility. To derive a per-unit value for manufacturing inputs such as electricity, allocation based on total production by mass was adopted.

As a default, secondary MLC datasets use a physical basis for allocation. Additionally, impacts and benefits associated with secondary functions of materials at end of life are included (i.e., production into a third life or energy generation from the incineration plant).

Data Sources:
Primary data were used where available, including supplier data for raw materials used in the production process. When primary data does not exist, secondary data for raw material production are obtained from the MLC database.

Data Quality:
Data quality follows the schema defined by the UN Environment Global Guidance on LCA database development, per Annex E of EN15804+A2.

Geographic Coverage:
The geographical scope of the manufacturing portion of the life cycle is Germany. The geographical scope of the raw material acquisition is Europe and Asia. Customer distribution, site installation, and use portions of the life cycle is within Europe and North America. Results are presented separately for European and North American scenarios.

Time Coverage:
This temporal scope is production during fiscal year 2024 (September 2023 – September 2024).

Technological Coverage:
The technological scope is the specific technology the company uses in manufacturing their product.

Post-Factory Gate Scenario Development

A4 (Delivery to Installation Site) Scenario Per Declared Unit
The product is delivered to the customer via truck within the E.U. and via truck and ocean freight to North America. Transportation averages are calculated based on sales records.

Distribution Details	European Truck	European Ship to N.A.	North American Truck
Vehicle Type	Truck-trailer, Euro 1, 34 - 40t gross weight / 27t payload capacity	Bulk commodity carrier, 1.000 to 250.000 dwt payload capacity, deep sea	Heavy-duty Diesel Truck / 53,333 lb payload – 8b
Fuel Efficiency [L/100km]	56.2	15,134	42
Fuel Type	Diesel	Diesel	Diesel
Distance [km]	944	8120	944
Capacity Utilization [%]	61%	53%	67%
Weight of Products Transported [kg]	1.61E+00	1.61E+00	1.61E+00
Capacity utilization volume factor	1	1	1

A5 (Construction) Scenario Per Declared Unit
Since DITRA-HEAT-DUO PS has a built-in adhesive backing, ancillary installation materials are not required. Packaging waste disposal have been modeled as per guidelines in the PCR.

To install DITRA-HEAT-DUO PS, the polypropylene protective film covering the adhesive backing is removed. Then, the product is laid in place, adhesive side down.

Construction Phase End of Life Fates	DITRA-HEAT-DUO PS E.U. Scenario	DITRA-HEAT-DUO PS N.A. Scenario
Product wastage	5%	5%
Waste materials at the construction site before waste processing, generated by product installation	3.68E-01	3.68E-01
Product Waste to Incineration	7.47E-02	0.00E+00
Product Waste to Landfill	0.00E+00	7.47E-02
Packaging Waste to Landfill	2.42E-01	2.42E-01
Packaging Waste to Incineration	0.00E+00	0.00E+00
Packaging Waste to Recycling	5.06E-02	5.06E-02
Biogenic carbon content of packaging	2.18E-02	2.18E-02

The product should be installed according to the manufacturer's instructions found at Schlüter-Systems product pages for DITRA-HEAT-DUO PS North America and E.U.

B1-B7 (Use) Scenario Per Declared Unit

This stage contains all of the energy, water, and materials related to the use of the product, including cleaning, maintenance, and replacements. The DITRA-HEAT-DUO PS membrane does not require any inputs or energy for maintenance or use. Once installed, it lies below tile flooring protecting the substrate from any damage due to moisture or leakage. Heat is provided by a separate product (cabling), thus no energy is required to use DITRA-HEAT-DUO PS.

This membrane typically lasts as long as the building (75 years) and generally don't need to be replaced unless they are damaged or not installed as per manufacturer guidelines.

C1-C4 (Product End of Life) Scenario Per Declared Unit
In this stage, the product is transported to the end-of-life facility and disposed.

It is assumed that the membrane, including the peel-and-stick adhesive backing, is sent to landfill in North America as mixed construction waste, and to incineration in Europe.

The table below shows the parameters for the end-of-life scenario utilized in the model. All waste has been classified according to the PCR and regional standards.

Distribution Details	DITRA-HEAT-DUO PS (E.U.)	DITRA-HEAT-DUO PS (N.A.)
Collected as mixed construction waste	1.20E+00	1.20E+00
Energy input	0.00E+00	0.00E+00
Waste to Landfill	0.00E+00	1.20E+00
Distance to Landfill	161	161
Waste to Incineration	1.20E+00	0.00E+00
Distance to Incineration	161	0

Module D (Benefits and Loads Beyond the System Boundary) Scenario Per Declared Unit
Module D calculates the environmental benefits or loads from reusing products, recycling materials, and producing energy from end-of-life options. Only those flows leaving the product system that have not been allocated as co-products and that have passed the end-of-waste state are included within module D.

Within this study, the flows within Module D fall into the category of waste-to-energy for the EU scenario. However, the energy conversion efficiency rate is less than 60% for incineration of plastics, details of which are provided in the table below, which based on EN15804+A2, the impacts of the incineration process are assigned to C4. Module D represents benefits associated with electricity and steam generated as part of the incineration process.

Parameter	DITRA-HEAT-DUO PS (E.U.)
Incineration with energy recovery [kg]	0.48
Heating value [MJ/kg]	30
Electrical energy conversion efficiency rate [%]	12.9
Thermal energy conversion efficiency rate [%]	29.8

Modules declared, geographical scope, share of primary data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Distribution/ installation stage		Use stage							End-of-life stage				Beyond product life cycle
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	**A1**	**A2**	**A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	EU/CN	EU/CN	DE	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA	EU/NA
Share of primary data	65.2%/83.6%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table 1: Share of primary data, of GWP-GHG results for A1-A3

Process	Source type	Source	Reference year	Data category	Data Quality Level	Share of primary data, of GWP-GHG results for A1-A3
Generation of electricity used in manufacturing of product	Database	Sphera Managed LCA Content 2024.2	2024	Primary data	Very good	70.35%
Transport of raw materials to manufacturing	Database	Sphera Managed LCA Content 2024.2	2024	Primary data	Good	3.80%
Transport of packaging materials to manufacturing	Database	Sphera Managed LCA Content 2024.2	2024	Primary data	Good	0.13%
Production of raw materials	Database	Sphera Managed LCA Content 2024.2	2024	Secondary data	Good	0.00%
Production of packaging	Database	Sphera Managed LCA Content 2024.2	2024	Secondary data	Good	0.00%
Other processes	Database	Sphera Managed LCA Content 2024.2	2024	Secondary data	Fair	0.00%
Total share of primary data, of GWP-GHG results for A1-A3						74.3%

Results of the environmental performance indicators – EU Installation, Use, and Disposal Scenario – Most Representative Scenario

The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).
The environmental performance results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

Mandatory impact category indicators according to EN 15804+A2 (EF 3.1)

LCIA results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario – Most Representative Scenario

Indicator	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG	kg CO_2 eq.	4.17E+00	1.00E-01	2.77E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.49E-02	0.00E+00	1.26E+00	-5.70E-01
GWP-total	kg CO_2 eq.	4.04E+00	1.02E-01	9.84E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.51E-02	0.00E+00	1.52E+00	-5.70E-01
GWP-fossil	kg CO_2 eq.	4.17E+00	1.00E-01	9.12E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.49E-02	0.00E+00	1.26E+00	-5.70E-01
GWP-biogenic	kg CO_2 eq.	-1.34E-01	5.78E-04	7.12E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.00E-05	0.00E+00	2.56E-01	0.00E+00
GWP-luluc	kg CO_2 eq.	2.99E-03	1.94E-03	2.85E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.01E-04	0.00E+00	1.82E-04	-6.58E-05
ODP	kg CFC 11 eq.	3.48E-11	3.19E-14	1.87E-12	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.91E-15	0.00E+00	5.39E-13	-6.69E-12
AP	mol H^+ eq.	9.77E-03	1.07E-03	6.04E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.39E-05	0.00E+00	3.75E-04	-5.28E-04
EP-freshwater	kg P eq.	8.54E-06	2.75E-07	1.77E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.53E-08	0.00E+00	1.61E-05	-1.36E-06
EP-marine	kg N eq.	2.55E-03	5.44E-04	1.81E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.44E-05	0.00E+00	8.18E-05	-1.94E-04
EP-terrestrial	mol N eq.	2.74E-02	6.01E-03	1.94E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.79E-04	0.00E+00	1.36E-03	-2.06E-03
POCP	kg NMVOC eq.	9.09E-03	1.03E-03	5.81E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.89E-05	0.00E+00	2.43E-04	-5.13E-04
ADP-minerals&metals *	kg Sb eq.	2.62E-05	1.72E-08	1.32E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.12E-09	0.00E+00	5.90E-09	-5.31E-08
ADP-fossil*	MJ	1.03E+02	1.33E+00	5.28E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.24E-01	0.00E+00	1.08E+00	-8.68E+00
WDP*	m^3	3.41E-01	7.24E-04	2.52E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.86E-05	0.00E+00	1.19E-01	-7.17E-03
PM	Disease incidence	1.55E-07	1.02E-08	9.03E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.53E-10	0.00E+00	4.12E-09	-3.69E-09
IRP**	kBq U235 eq	1.46E-01	2.23E-04	7.96E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.46E-05	0.00E+00	2.96E-03	-3.05E-02
ETP-fw*	CTUe	4.46E+01	1.03E+00	2.41E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.83E-02	0.00E+00	1.25E+00	-1.18E+00
HTP-c*	CTUh	1.25E-09	2.07E-11	6.73E-11	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.77E-12	0.00E+00	3.42E-11	-8.80E-11
HTP-nc*	CTUh	4.84E-08	8.66E-10	2.63E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.13E-10	0.00E+00	1.76E-09	-3.40E-09
Land Use*	Pt	9.92E+01	8.82E-01	5.61E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.59E-02	0.00E+00	2.81E-01	-2.10E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals & metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption															

** Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.*
***This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.*

Impact category indicators according to TRACI 2.1

LCIA results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
AP	kg SO_2 eq	8.94E-03	1.01E-03	5.75E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.82E-05	0.00E+00	5.12E-04	-5.34E-04
EP	kg N eq	6.68E-04	6.90E-05	5.38E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.32E-06	0.00E+00	1.20E-04	-7.46E-05
GWP	kg CO_2 eq	3.94E+00	9.92E-02	3.36E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.47E-02	0.00E+00	1.51E+00	-5.67E-01
ODP	kg CFC 11 eq	1.30E-11	6.42E-16	6.51E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.85E-17	0.00E+00	1.07E-14	-1.33E-13
SFP	kg O_3 eq	1.28E+01	1.90E-01	6.60E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.30E-02	0.00E+00	1.04E-01	-9.90E-01
Acronyms	AP = Acidification potential of soil and water; EP = Eutrophication potential; GWP = Global Warming Air, incl. biogenic carbon; ODP – depletion of stratospheric ozone layer; SFP = smog formation potential															

Impact category indicators according to IPCC AR6

LCIA results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
GWPin	kg CO_2 eq.	4.04E+00	1.01E-01	3.49E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.50E-02	0.00E+00	1.52E+00	-5.74E-01
GWPex	kg CO_2 eq.	4.19E+00	1.01E-01	3.20E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.50E-02	0.00E+00	1.26E+00	-5.74E-01
Acronyms	GWPin = Global Warming Potential including biogenic carbon; GWPex =Global Warming Potential excluding biogenic carbon															

Carbon Emissions and Removals

Carbon emissions and removals for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
BCRP	kg CO_2	5.13E-04	0.00E+00	2.57E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP	kg CO_2	0.00E+00	0.00E+00	3.63E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.25E-04	0.00E+00
BCRK	kg CO_2	2.29E-01	0.00E+00	1.59E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	kg CO_2	0.00E+00	0.00E+00	3.33E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE	kg CO_2	0.00E+00	0.00E+00	6.35E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Acronyms	BCRP = Biogenic Carbon Removal from Product; BCEP = Biogenic Carbon Emissions from Product; BCRK = Biogenic Carbon Removal from Packaging; BCEK = Biogenic Carbon Emissions from Packaging; BCEW = Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes; CCE = Calcination Carbon Emissions; CCR = Carbonation Carbon Removals; CWNR = Carbon Emissions from Combustion of Waste from Non- Renewable Sources used in Production Processes															

Resource use indicators

Resource use results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
PERE	MJ	2.02E+01	1.47E-01	1.10E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.90E-03	0.00E+00	2.91E-01	-3.22E+00
PERM	MJ	2.26E+00	0.00E+00	1.51E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	2.24E+01	1.47E-01	1.25E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.90E-03	0.00E+00	2.91E-01	-3.22E+00
PENRE	MJ	5.86E+01	1.33E+00	3.05E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.24E-01	0.00E+00	1.08E+00	-8.68E+00
PENRM	MJ	4.43E+01	0.00E+00	2.22E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	1.03E+02	1.33E+00	5.28E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.24E-01	0.00E+00	1.08E+00	-8.68E+00
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m^3	2.32E-02	1.37E-04	1.37E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.61E-06	0.00E+00	2.87E-03	-1.03E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; RE = Recovered Energy; FW = Use of net fresh water															

Waste indicators

Waste results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Hazardous waste disposed	kg	3.24E-07	6.45E-11	1.68E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.25E-12	0.00E+00	6.15E-10	-7.48E-09
Non-hazardous waste disposed	kg	2.92E-01	2.24E-04	1.09E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.91E-05	0.00E+00	1.07E+00	-4.63E-03
Radioactive waste disposed	kg	1.44E-03	2.11E-06	7.81E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.33E-07	0.00E+00	2.59E-05	-2.87E-04
High-level radioactive waste, conditioned, to final repository	kg	1.55E-06	2.24E-09	8.39E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.39E-10	0.00E+00	2.66E-08	-3.05E-07
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	1.44E-03	2.11E-06	7.80E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.32E-07	0.00E+00	2.59E-05	-2.87E-04

Output flow indicators

Output flow results for DITRA-HEAT-DUO PS 1 m² – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	2.44E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00E+00	0.00E+00	1.34E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.88E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	2.66E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.36E+00	0.00E+00

Results of the environmental performance indicators – North America Installation, Use, and Disposal Scenario – Additional Scenario

Mandatory impact category indicators according to EN 15804+A2 (EF 3.1)

LCIA results for DITRA-HEAT-DUO PS 1 m² – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
GWP-GHG	kg CO_2 eq.	4.17E+00	1.59E-01	2.48E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.86E-02	0.00E+00	3.10E-02	0.00E+00
GWP-total	kg CO_2 eq.	4.04E+00	1.59E-01	9.14E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.87E-02	0.00E+00	3.09E-02	0.00E+00
GWP-fossil	kg CO_2 eq.	4.17E+00	1.59E-01	8.83E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.86E-02	0.00E+00	3.10E-02	0.00E+00
GWP-biogenic	kg CO_2 eq.	-1.34E-01	2.34E-04	3.07E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.82E-05	0.00E+00	2.40E-02	0.00E+00
GWP-luluc	kg CO_2 eq.	2.99E-03	3.95E-04	1.58E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.05E-05	0.00E+00	1.44E-05	0.00E+00
ODP	kg CFC 11 eq.	3.48E-11	2.45E-14	1.93E-12	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.76E-15	0.00E+00	7.48E-14	0.00E+00
AP	mol H^+ eq.	9.77E-03	1.61E-03	6.29E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.74E-05	0.00E+00	1.85E-04	0.00E+00
EP-freshwater	kg P eq.	8.54E-06	6.46E-07	2.58E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	9.51E-08	0.00E+00	3.74E-05	0.00E+00
EP-marine	kg N eq.	2.55E-03	5.81E-04	1.73E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.77E-05	0.00E+00	4.60E-05	0.00E+00
EP-terrestrial	mol N eq.	2.74E-02	6.40E-03	1.85E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.06E-04	0.00E+00	5.04E-04	0.00E+00
POCP	kg NMVOC eq.	9.09E-03	1.34E-03	5.70E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.58E-05	0.00E+00	1.41E-04	0.00E+00

ADP-minerals&metals*	kg Sb eq.	2.62E-05	1.88E-08	1.31E-06	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-09	0.00E+00	3.18E-09	0.00E+00
ADP-fossil*	MJ	1.03E+02	2.07E+00	5.76E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-01	0.00E+00	4.71E-01	0.00E+00
WDP*	m^3	3.41E-01	7.14E-03	2.50E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.12E-03	0.00E+00	1.69E-03	0.00E+00
PM	Disease incidence	1.55E-07	2.25E-08	9.33E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.37E-10	0.00E+00	2.11E-09	0.00E+00
IRP**	kBq U235 eq	1.46E-01	4.78E-04	1.18E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	6.31E-05	0.00E+00	4.81E-04	0.00E+00
ETP-fw*	CTUe	4.46E+01	1.60E+00	2.50E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.93E-01	0.00E+00	2.09E+00	0.00E+00
HTP-c*	CTUh	1.25E-09	3.73E-11	6.89E-11	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.76E-12	0.00E+00	6.25E-12	0.00E+00
HTP-nc*	CTUh	4.84E-08	7.52E-10	2.55E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.57E-11	0.00E+00	3.94E-10	0.00E+00
Land Use*	Pt	9.92E+01	4.50E-01	4.51E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	4.80E-02	0.00E+00	4.22E-02	0.00E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption															

** Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.*

***This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.*

Impact category indicators according to TRACI 2.1

LCIA results for DITRA-HEAT-DUO PS 1 m^2 – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
AP	kg SO_2 eq	8.94E-03	1.43E-03	5.79E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.31E-05	0.00E+00	1.61E-04	0.00E+00
EP	kg N eq	6.68E-04	8.27E-05	5.64E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.56E-06	0.00E+00	2.55E-04	0.00E+00
GWP	kg CO_2 eq	3.94E+00	1.57E-01	2.70E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.85E-02	0.00E+00	3.03E-02	0.00E+00
ODP	kg CFC 11 eq	1.30E-11	4.92E-16	6.48E-13	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	5.52E-17	0.00E+00	1.49E-15	0.00E+00
SFP	kg O_3 eq	1.28E+01	2.94E-01	6.87E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.20E-03	0.00E+00	6.10E-02	0.00E+00
Acronyms	AP = Acidification potential of soil and water; EP = Eutrophication potential; GWP = Global Warming Air, incl. biogenic carbon; ODP – depletion of stratospheric ozone layer; SFP = smog formation potential															

Impact category indicators according to IPCC AR6

LCIA results for DITRA-HEAT-DUO PS 1 m^2 – EU Installation, Use, and Disposal Scenario - Most Representative Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
GWPin	kg CO_2 eq.	4.04E+00	1.59E-01	2.79E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.86E-02	0.00E+00	3.09E-02	0.00E+00
GWPex	kg CO_2 eq.	4.19E+00	1.59E-01	2.70E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.86E-02	0.00E+00	3.10E-02	0.00E+00
Acronyms	GWPin = Global Warming Potential including biogenic carbon; GWPex =Global Warming Potential excluding biogenic carbon															

Carbon Emissions and Removals

Carbon emissions and removals for DITRA-HEAT-DUO PS 1 m² – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
BCRP	kg CO_2	5.13E-04	0.00E+00	2.56E-05	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEP	kg CO_2	0.00E+00	0.00E+00	7.19E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.44E+00	0.00E+00
BCRK	kg CO_2	2.29E-01	0.00E+00	7.00E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEK	kg CO_2	0.00E+00	0.00E+00	1.47E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
BCEW	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCE	kg CO_2	0.00E+00	0.00E+00	6.35E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CCR	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
CWNR	kg CO_2	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Acronyms	BCRP = Biogenic Carbon Removal from Product; BCEP = Biogenic Carbon Emissions from Product; BCRK = Biogenic Carbon Removal from Packaging; BCEK = Biogenic Carbon Emissions from Packaging; BCEW = Biogenic Carbon Emission from Combustion of Waste from Renewable Sources Used in Production Processes; CCE = Calcination Carbon Emissions; CCR = Carbonation Carbon Removals; CWNR = Carbon Emissions from Combustion of Waste from Non- Renewable Sources used in Production Processes															

Resource use indicators

Resource use results for DITRA-HEAT-DUO PS 1 m² – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
PERE	MJ	2.02E+01	9.46E-02	1.12E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.09E-02	0.00E+00	5.84E-02	0.00E+00
PERM	MJ	2.26E+00	0.00E+00	7.50E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	2.24E+01	9.46E-02	1.19E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.09E-02	0.00E+00	5.84E-02	0.00E+00
PENRE	MJ	5.86E+01	2.07E+00	3.55E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-01	0.00E+00	4.71E-01	0.00E+00
PENRM	MJ	4.43E+01	0.00E+00	2.21E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	1.03E+02	2.07E+00	5.76E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-01	0.00E+00	4.71E-01	0.00E+00
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RE	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m^3	2.32E-02	2.52E-04	1.39E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.64E-05	0.00E+00	6.08E-05	0.00E+00
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; RE = Recovered Energy; FW = Use of net fresh water															

Waste indicators

Waste results for DITRA-HEAT-DUO PS 1 m² – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Hazardous waste disposed	kg	3.24E-07	2.28E-10	1.61E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.34E-11	0.00E+00	1.16E-10	0.00E+00
Non-hazardous waste disposed	kg	2.92E-01	2.20E-04	1.08E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.47E-05	0.00E+00	1.43E+00	0.00E+00
Radioactive waste disposed	kg	1.44E-03	5.35E-06	1.28E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.46E-07	0.00E+00	5.01E-06	0.00E+00
High-level radioactive waste, conditioned, to final repository	kg	1.55E-06	6.20E-09	1.45E-07	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	8.84E-10	0.00E+00	5.60E-09	0.00E+00
Intermediate- and low-level radioactive waste, conditioned, to final repository	kg	1.44E-03	5.34E-06	1.28E-04	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	7.45E-07	0.00E+00	5.00E-06	0.00E+00

Output flow indicators

Output flow results for DITRA-HEAT-DUO PS 1 m² – North America Installation, Use, and Disposal Scenario – Additional Scenario																
Indicator	**Unit**	**A1-A3**	**A4**	**A5**	**B1**	**B2**	**B3**	**B4**	**B5**	**B6**	**B7**	**C1**	**C2**	**C3**	**C4**	**D**
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00E+00	0.00E+00	2.14E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	2.79E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

ADDITIONAL ENVIRONMENTAL INFORMATION

DITRA-HEAT-DUO PS was tested in summer 2024 by the testing institute Eurofins Danmark for emissions of volatile organic compounds (VOC) according to the Indoor Air Comfort GOLD test protocol and is found to be suitable for indoor use.

ABBREVIATIONS

Abbreviation	Definition
EN	European Norm (Standard)
EF	Environmental Footprint
GPI	General Programme Instructions
ISO	International Organization for Standardization
CEN	European Committee for Standardization
CLC	Co-location centre
CPC	Central product classification
GHS	Globally harmonized system of classification and labelling of chemicals
GRI	Global Reporting Initiative
SVHC	Substances of Very High Concern
ND	Not Declared
GWP	Global Warming Potential
GWP-GHG	Global Warming Potential – Greenhouse Gas
EU	European Union
NA	North America
CN	China

REFERENCES

Boulay, A., Bare, J., Benini, L., Berger, M., Lathuillière, M., Manzardo, A., . . . Pfister, S. (2016). *The WULCA consensus characterization model for water scarcity footprints: Assessing impacts of water consumption based on available water remaining (AWARE).*

CEN. (2019). *EN 15804+A2: Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.* European Committee for Standardization.

General Programme Instructions of the International EPD® System. Version 5.0.

Guinée, J., Gorrée, M., Heijungs, R., Huppes, G., Kleijn, R., de Koning, A., . . . Huijbregts, M. (2002). *Handbook on Life Cycle Assessment: Operational Guide to the ISO Standards. Series: Eco-efficiency in industry and science.* Dordrecht: Kluwer Academic Publishers.

International EPD System. (2019). *Product Category Rules - CONSTRUCTION PRODUCTS, PCR 2019:14, VERSION 2.0.1.* International EPD System.

International EPD System. (2021). *GENERAL PROGRAMME INSTRUCTIONS FOR THE INTERNATIONAL EPD® SYSTEM, VERSION 4.0.* International EPD System.

IPCC. (2013). *Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change.* [Stocker, T.F., D. Qin, G.-K. Plattner, M. Tignor, S.K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex and P.M. Midgley (eds.)]. Cambridge, United Kingdom and New York, NY, USA: Cambridge University Press.

ISO. (2006). *ISO 14025: Environmental labels and declarations - Type III environmental declarations - Principles and procedures.* Geneva: International Organization for Standardization.

ISO. (2006). *ISO 14040/Amd 1:2020: Environmental management - Life cycle assessment - Principles and framework.* Geneva: International Organization for Standardization.

ISO. (2006). *ISO 14044/Amd 1:2017/Amd 2:2020: Environmental Management - Life cycle assessment - Requirements and Guidelines.* Geneva: International Organization for Standardization.

ISO. (2017). *ISO 21930: Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services.* Geneva: International Organization for Standardization.

Rosalie, v., Huijbregts, M., Hollander, H. A., Jaarsveld, H. A., Sauter, F. J., Struijs, J., . . . Meent, D. v. (2008). European characterization factors for human health damage of PM10 and ozone in life cycle impact assessment. *Atmospheric Environment*, 441-453.

Seppälä, J., Posch, M., Johansson, M., & Hettelingh, J.-P. (2006). Country-Dependent Characterisation Factors for Acidification and Terrestrial Eutrophication Based on Accumulated Exceedance as an Impact Category Indicator. *The International Journal of Life Cycle Assessment*, 403-416.

Synwer GmbH. (2022). *Environmental Product Declaration - Synwer® – Syn J 230 Sd 2.* Kiwa-Ecobility Experts.

US EPA. (2012). *TRACI: The Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts. Version 2.1 - User Guide*. Retrieved from https://nepis.epa.gov/Adobe/PDF/P100HN53.pdf

VERSION HISTORY

Original Version of the EPD, 2026-06-18

EPD
INTERNATIONAL EPD SYSTEM
www.environdec.com