

Schlüter®-DILEX-MOP

Movement joint profile
for mortar bed applications

4.4

Product data sheet



Application and function

Schlüter-DILEX-MOP is a profile with sturdy serrated lateral sections made of recycled rigid PVC and a central movement zone made of soft PVC. The profile is available in four different heights and is used as a movement joint in coverings made of pavers, ceramic tiles, and natural or man-made stone.

The DILEX-MOP 25 is well suited for coverings that are set using the vibration method with medium-bed mortar.

DILEX-MOP in heights of 35 - 65 mm is used for coverings that are set in a mortar bed. The DILEX-MOP separates individual installation segments in the covering and absorbs minor compressive stresses in the soft PVC movement zone. Since the profile does not have lateral frictional anchoring, it is not suited for absorbing any tensile stresses that may be present.

The lateral sections of the profile are made of rigid PVC and protect the edges of the adjacent covering from mechanical stresses caused by conveyor vehicles, subject to the limited mechanical suitability of PVC profiles in edge protection.

The lateral profile sections are made of environmentally-friendly recycled rigid PVC and may vary slightly in colour. The profiles are therefore primarily intended for industrial applications.

Schlüter-DILEX-MOP may also be tapped into saw-cut joints or inserted into wider joint cuts, e.g. as part of renovation projects. The remaining joint space between the tile and the profile must be filled completely with grout or epoxy.




Material

The DILEX-MOP features lateral sections made of rigid PVC and a movement zone made of soft PVC at the top.

Material properties and areas of application:

The profile is resistant to most chemicals encountered in tiled environments. In special cases, the suitability of materials must be verified based on the anticipated chemical, mechanical, and/or other stresses.

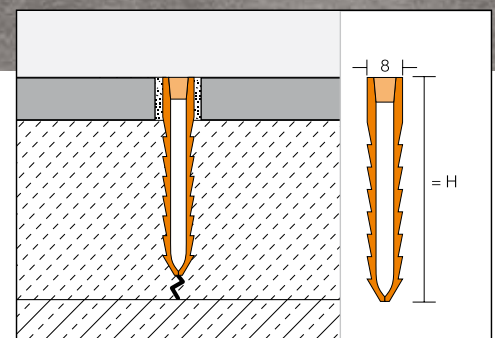



The DILEX-MOP is installed as an expansion joint profile in tile and paver coverings set into a mortar bed or by using the vibration method. The profile separates the individual installation segments of the covering and absorbs compressive stresses in its soft PVC movement zone.

Notes

Schlüter-DILEX-MOP is resistant to fungi and bacteria and requires no special maintenance or care. The profile can be cleaned with regular household detergents when cleaning the tile covering.

Installation

1. Select the profile height according to the height of the assembly.
2. Set the profile flush against the edge of completed covering segments. The lateral profile parts must be solidly embedded in the mortar.
3. Install the adjacent tile covering flush against the profile and solidly embed the profile.
4. Fill the remaining joint space between the profile and the covering completely with grout.

Installation note on joint repair:

Insert or tap the profile into the appropriately prepared joint chamber and fill the joint space between the profile and the covering completely with grout, epoxy, or dry-set mortar.

Text template for tenders:

Supply _____ per metre Schlüter-DILEX-MOP as a movement/joint profile comprising recycled rigid PVC lateral sections, connected at the top by a soft PVC movement zone, for floor coverings set in a mortar bed or by using the vibration method, to be supplied and installed flush with surface coverings according to manufacturer's specifications.

Profile height: _____ mm

Art.-No.: _____

Material: _____/m

Labour: _____/m

Total: _____/m

Product overview:


Schlüter®-DILEX-MOP

Colour: G = grey, DA= dark anthracite,

GS = graphite black

Length supplied: 2.50 m

Colour	G	DA	GS
H = 25 mm	•	•	•
H = 35 mm	•	•	•
H = 50 mm	•	•	•
H = 65 mm	•	•	•

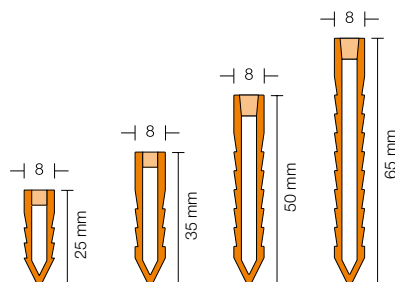

Application area based on local traffic volume



Persons

Total weight —



Shopping carts

Total weight max. 0.4 t



Cars

Total weight max. 3.5 t



Trucks

Total weight max. 25 t



Pallet trucks

Hard rubber tyres

Total weight max. 2.5 t
(pallet trucks with tandem axles only)

● permissible

Schlüter-Systems KG | Schmölestraße 7 | D-58640 Iserlohn

+49 2371 971-0 | +49 2371 971-1111 | info@schluter.de | schluter-systems.com

Schlüter-Systems Ltd | Units 3-6 Bardon 22 Industrial Estate | Bardon Hill | Coalville | Leicestershire | LE67 1TE

+44 (0) 1530 813396 | sales@schluter.co.uk | schluter.co.uk