



KERDI-DRAIN-F

Drain Body Outlet: ABS, PVC and Stainless Steel - **ICC-ES PMG-1204**

KERDI-DRAIN-F is a floor drain specifically designed to allow connection to Schluter®-DITRA and Schluter®-DITRA-HEAT uncoupling membranes in floor applications. KERDI-DRAIN-F features a flat, narrow bonding flange to allow for placement against walls or in corners on floors. KERDI-DRAIN-F in polypropylene features a 2" (50 mm) outlet that allows for either an ABS or PVC drain connection. KERDI-DRAIN-F in stainless steel is available with a 2" (50 mm) no-hub or threaded outlet. It can be combined with virtually any KERDI-DRAIN grate assembly, with the exception of the tileable grate and the 6" (150 mm) square and round grates. *KERDI-DRAIN grate assembly sold separately.

Schluter®-KERDI-DRAIN-F

Material	Size	Connection Type	Item No.	Select
Polypropylene	2" (50 mm)	NPT Solvent weld	KDF2FL	
Stainless steel		No-hub	KDF2EFL	
Stainless steel		Threaded	KDF2ETHFL	

Also included:



Construction cover
Protects the KERDI collar and prevents debris from falling into the drain.



Vertical height adjustment collar
Compatible with virtually all designs of 4" KERDI-DRAIN grates, sold separately.

Note: not suitable for use with the tileable grate or 6" grates.





Polypropylene




Stainless steel with no-hub outlet



Stainless steel with threaded outlet

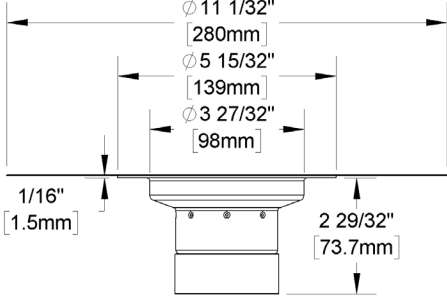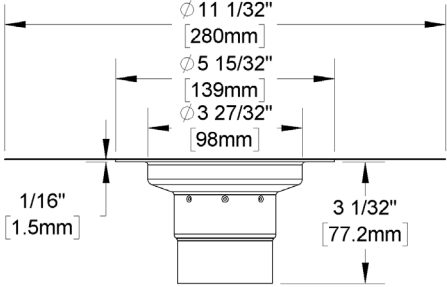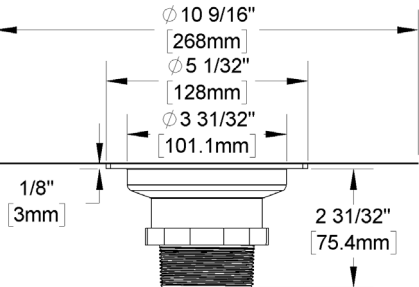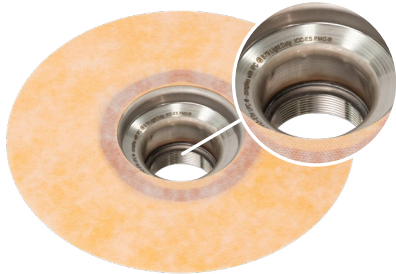

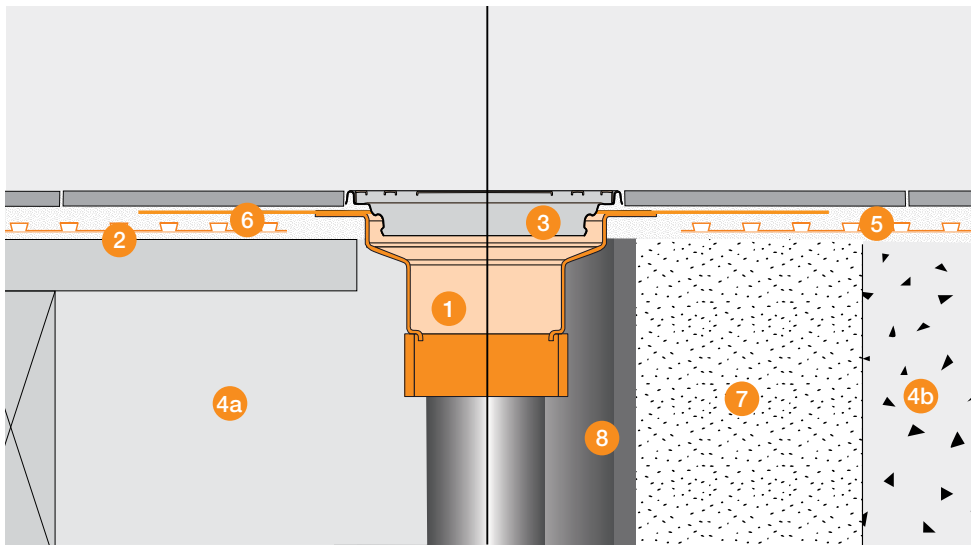

- 1 Schluter®-KERDI-DRAIN-F Flange
- 2 Schluter®-DITRA (shown) or DITRA-XL/
DITRA-HEAT/DITRA-HEAT-DUO
- 3 Schluter®-KERDI-DRAIN grate
assembly (sold separately)
- 4 Subfloor
a) Wood
b) Concrete
- 5 Schluter ALL-SET® thin-set mortar
- 6 Schluter®-KERDI membrane collar
- 7 Mortar bed or concrete
- 8 Pipe coupling or similar

Installation Note:

Do not exceed maximum core hole size as required for the specified KERDI-DRAIN. Locate and cut or core a hole in the substrate for the drain outlet and coupling to the waste line using the template provided. Cut a 4" (100 mm) diameter hole in the substrate for the drain outlet and coupling to the waste line using the template provided. For a box-out in concrete, limit the diameter of the hole to 4-1/4" (108 mm) maximum to ensure proper support for the tile assembly.

Listings and Certifications

KERDI-DRAIN-F is listed by ICC-ES (Report No. PMG-1204), UPC® and CSA.

See **Floor Drains technical data sheet** for more information on KERDI-DRAIN-F, including installation instructions and KERDI-DRAIN grates.

For a complete offering of materials and SKUs, please visit www.schluter.com. This specification sheet is subject to change without notice. Please visit www.schluter.com for the latest version.