



INNOVATIONEN MIT PROFIL

DECLARATION OF PERFORMANCE

according to Annex III of Regulation (EU) No. 305/2011 amended by Delegated Regulation (EU) No. 574/2014
(Construction Products Regulation)

for the waterproofing system Schlüter®-DITRA

No. DoP-009

Unique identification code of the product-type:

Schlüter®-DITRA, -KERDI-KEBA, -KERDI-FLEX, -KERDI-FIX, -KERDI-KERECK/FI&FA, -KERDI-COLL-L, -KERDI-KM, -KERDI-MV

Intended use/es:

Waterproofing system for walls and floors in interior spaces as well as wetrooms

Manufacturer:

Schlüter Systems KG
Schmölestraße 7
DE-58640 Iserlohn
Tel: +49 2371 971 0
Web: www.schlueter-systems.com

System/s of AVCP:

System 2+
System 3 (reaction to fire)

European Assessment Document:

EAD 030436-00-0503

European Technical Assessment:

ETA-23/0556

Technical Assessment Body:

ETA-Danmark A/S

Notified body/ies:

Säurefliesner-Vereinigung e. V. (NB 1212)
Warringtonfire Frankfurt GmbH (reaction to fire) (NB 1378)

Declared performance/s:

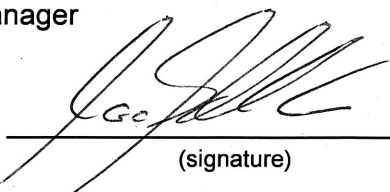
Characteristic	Assessment of characteristic		System for assessment and verification of constancy of performance	Harmonised technical specification
Safety in case of fire (BWR2)			3	EAD 030436-00-0503
Reaction to fire (EN 13501-1)	Euroclass E			
Hygiene, health and the environment (BWR3)				
Content, emission and/or release of dangerous substances				
Release scenario: IA2	After 3 days [µg/m³]	After 28 days [µg/m³]		
SVOC	None	None		
TVOC	<5	<5		
Vapour permeability	µ = 73397 / Sd = 190 m			
Water tightness	Watertight			
Crack bridging ability	Assessment category 3			
Bond strength	Assessment category 1 resp. Assessment category 3			
Scratching resistance	Not relevant			
Joint bridging ability	Pass			
Water tightness around penetrations	Watertight			
Resistance to temperature	Pass			
Resistance to water	Assessment category 1 resp. Assessment category 2			
Resistance to alkalinity	Pass. Assesment category 2			
Resistance to mechanical wear	Not relevant			
Joint strength	Longitudinal direction: 304 N/50mm Transverse direction: 259 N/50mm			
Flexibility	No cracking or other surface deterioration visible			
Safety in use (BWR4)				
Slipperiness	Not relevant			
Cleanability	Not relevant			
Thickness	3,5 ± 0,3 mm			

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Marc Schlüter, General Manager
(name and function)

Iserlohn, 17 February 2025
(place and date of issue)


(signature)