
Schluter®-KERDI-BOARD-SB/-SC

PREFABRICATED SHOWER BENCH AND CURB

KERDI-BOARD-SB/-SC are lightweight, waterproof, prefabricated shower benches (-SB) and curbs (-SC) made of KERDI-BOARD. Designed to integrate with the Schluter-Shower System using KERDI or KERDI-BAND to maintain a waterproof connection, these ready-to-tile components allow for fast and simple installation of benches and curbs in tiled shower applications without the use of moisture-sensitive building materials.



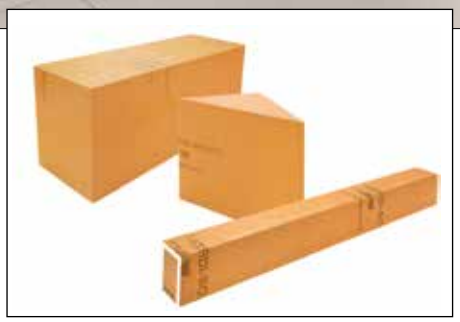

Features and Benefits

- Eliminate the need to build benches and curbs using sawn lumber and solid backing
  - o Considerably reduces installation time
  - o Avoids the use of moisture-sensitive materials
- Waterproof and ready to tile
- Lightweight, stable, and load-bearing
- Easy to install using thin-set mortar

KERDI-BOARD-SB Benches

- Feature a sloped surface to prevent water accumulation
- Available in triangular and rectangular formats, please refer to the product item codes table for available dimensions.
- Triangular benches include preformed 135° KERDI-KERECK inside corners, as well as right and left KERDI-KERS-B bench corners to simplify waterproofing connections at the wall.
- Rectangular benches include preformed 90° KERDI-KERECK inside and outside corners to simplify waterproofing connections at the wall.

KERDI-BOARD-SC Curbs

- Simple to adapt to shower formats – curbs are easy to cut to size, and multiple curbs can be installed adjacent to each other for larger showers
- Available in 3 lengths, please refer to the product item codes table for available dimensions.

Material

- KERDI-BOARD - Extruded polystyrene foam panel, with a special reinforcement material on both sides and fleece webbing

Where to Use

- In conjunction with the Schluter-Shower System
- Mortar bases
- Designed for use in tiled showers
- Curbs may be used in steam shower and steam room applications

Limitations

- Not intended for exterior applications
- Certain glass tiles may not be compatible with bonded waterproofing applications and/ or may require special setting materials. Consult glass tile manufacturer and Schluter-Systems for more information.
- Certain moisture-sensitive stones (e.g., green marble, or resin-backed tiles) may not be appropriate for use in wet areas or may require special setting materials. Consult stone supplier and Schluter-Systems for more information.

Allowable Substrates

- Concrete
- Plywood
- OSB
- Magnesium-oxide board
- Mortar bed
- Cement leveler
- Cement board

Surface Preparation

- The substrate must be clean, flat, and load bearing. Any truing of the surface must be done prior to KERDI-BOARD installation.

Installation

KERDI-BOARD-SB

1. Apply Schluter-SET, Schluter-ALL-SET, Schluter-FAST-SET, or unmodified thin-set mortar to the floor and to the edge of the shower base and walls using the Schluter®-MULTI-TROWEL or a 1/4" x 3/8" (6 mm x 10 mm) square- or U-notched trowel.
2. Press the bench firmly into place and check the underside and back sides to ensure that full coverage and support are achieved. Verify that the slope on the surface of the bench is directed toward the shower base (toward the drain).
3. Install KERDI-BAND, KERDI-KERECK, and KERDI-KERS-B (for triangular bench) to cover all seams and corners, and exposed, cut edges, ensuring a minimum 2" (50 mm) overlap. Work the membrane into the mortar to achieve full coverage, removing air pockets as needed.

KERDI-BOARD-SC

1. Apply Schluter-SET, Schluter-ALL-SET, Schluter-FAST-SET, or unmodified thin-set mortar to the floor and to the edge of the shower base and walls using the Schluter®-MULTI-TROWEL or a 1/4" x 3/8" (6 mm x 10 mm) square- or U-notched trowel.
2. Press the curb firmly into place. Check the underside of the curb to ensure that full coverage and support is achieved.
3. Seal the curb to the shower base and walls, as well as any adjacent curbs using KERDI-BAND waterproofing strips and KERDI-KERECK preformed waterproofing corners.

For complete installation guidelines and warranty criteria for shower applications, please download the Schluter-Shower System Installation Handbook.

Industry Standards and Sustainability Designations:

Product Performance Properties	
ASTM E96 Procedure E[1] (water vapor permeance)	0.36 perms – 1/2" (12.5 mm)
(Flame spread) ASTM E84 CAN/ULC S102.2	 Pass[2] Pass[3]
NFPA 286 (Thermal barrier evaluation)	Pass[2,4]
Physical Characteristics	
Composition	Extruded polystyrene foam panel, with a special reinforcement material on both sides and fleece webbing
Markings	Gridlines consisting of 3/8" x 3/8" (10 mm x 10 mm) squares printed on one side
Color	Orange outer fleece layers with white foam interior
Storage Conditions	In case of outdoor storage, protect the material from direct sunlight and weather exposure.
Service Temperature Range	-58°F to 158°F (-50°C to 70°C)
Sustainability Information	
VOC tested	LEED compliant
SDS	Available

[1] Using the desiccant method at 100°F (38°C) and 90% RH

[2] Per International Building Code Requirements, contact Schluter-Systems for more information

[3] Specific building categories, contact Schluter-Systems for more information

[4] Porcelain tile used as thermal barrier over 1/2" (12.5 mm) -thick KERDI-BOARD on wood framing

Product Item Numbers



Schluter®-KERDI-BOARD-SB — Prefabricated bench

Item No.	Width	Length	Height	Shape
KBSB 410 TA	16" – 41 cm	16" – 41 cm	20" – 51 cm	Triangular
KBSB 610 TA	24" – 61 cm	24" – 61 cm	20" – 51 cm	Triangular
KBSB 290 970 RA	38" – 97 cm	11-1/2" – 29 cm	20" – 51 cm	Rectangular
KBSB 410 1220 RA	48" – 122 cm	16" – 41 cm	20" – 51 cm	Rectangular



Schluter®-KERDI-BOARD-SC — Prefabricated curb

Item No.	Width	Length	Height
KBSC 115 150 1220	4-1/2" – 11.5 cm	38" – 97 cm	6" – 15 cm
KBSC 115 150 970	4-1/2" – 11.5 cm	48" – 122 cm	6" – 15 cm
KBSC 115 150 1524	4-1/2" – 11.5 cm	60" – 152 cm	6" – 15 cm

Additional Resources Available Online:

- Shower System Installation Handbook
- Installation and Instructional Videos

KERDI-BOARD-SB

Visit www.schluter.com/schluter-us/en_US/Building-Panels/KERDI-BOARD-Panels/Schluter%C2%AE-KERDI-BOARD-SB/p/KERDI_BOARD-SB

Or scan here:

KERDI-BOARD-SC

Visit www.schluter.com/schluter-us/en_US/Building-Panels/KERDI-BOARD-Panels/Schluter%C2%AE-KERDI-BOARD-SC/p/KERDI_BOARD-SC

Or scan here:

Warranties:

Schluter-Systems products and systems are covered under our warranty program, as applicable. For details and to access Schluter-Systems' warranty documents:

Visit www.schluter.com/warranties

Or scan here:

To obtain hard copies, please contact Customer Service at: 800-472-4588 (USA) or 800-667-8746 (Canada).

Schluter Systems L.P. 194 Pleasant Ridge Rd. | Plattsburgh, NY | 12901-5841 800-472-4588
Schluter Systems (Canada) Inc. 21100 chemin Ste-Marie | Ste-Anne-de-Bellevue, QC | H9X 3Y8 800-667-8746
schluter.com

This technical data sheet is subject to change without notice. Please visit Schluter.com for the latest version.

© 2026 Schluter-Systems. All rights reserved.

10/2026