

Schlüter®-BARA-RAKE/-RAKEG

Finishing profile
for attachment on sloped screeds

5.22

Product data sheet

Application and Function

Schlüter-BARA-RAKE/-RAKEG is a finishing profile for exposed edges of covering assemblies on balconies and terraces with existing sloped screeds.

Schlüter-BARA-RAKE is especially suited for assemblies with the bonded drainage mat Schlüter-DITRA-DRAIN. The perforated outer edges give the outer perimeter of tiled areas a neat appearance.

Furthermore, the profile covers the exposed edges of the bonded drainage mat Schlüter-DITRA-DRAIN, which is installed under the covering. The cross section of the profile openings is sufficiently large to guarantee drainage and ventilation.


The trapezoid perforated anchoring leg of **Schlüter-BARA-RAKE** is attached to the exposed edges with a dry set tile adhesive. Schlüter-KERDI may be used as a bonded waterproofing assembly, but trowel applied chemical products for bonded waterproofing are equally suitable.

Schlüter-BARA-RAKEG was designed for assemblies with the bonded uncoupling membrane Schlüter-DITRA. The closed outer edges give the outer perimeter of tiled areas a neat appearance. Schlüter-BARA-RAKE/-RAKEG creates a neat appearance and protects the exposed edges from weather influences and corrosion.



Material properties and areas of application:

The coating on the aluminium profile is colour stable, as well as UV and weather resistant. Visible surfaces should be protected against abrasion. In special cases, the suitability of Schlüter-BARA-RAKE/-RAKEG must be verified based on the anticipated chemical and mechanical stresses.

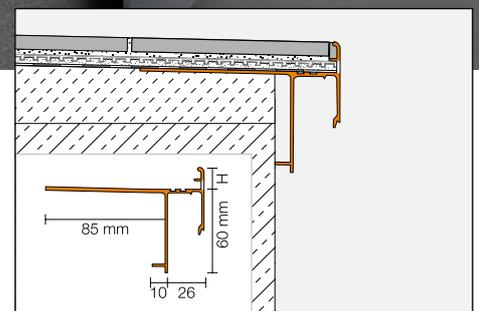

Material

The profile is available in the following material versions:


AC = colour coated aluminium

C/A = MyDesign by Schlüter-Systems*



As part of the MyDesign by Schlüter-Systems* series, Schlüter-BARA-RAKE and -RAKEG can be ordered with a coating in 190 colours of the RAL Classic chart.

* The product advisors of our sales service and our Technical Department will be pleased to assist you with any questions you may have about MyDesign by Schlüter-Systems.

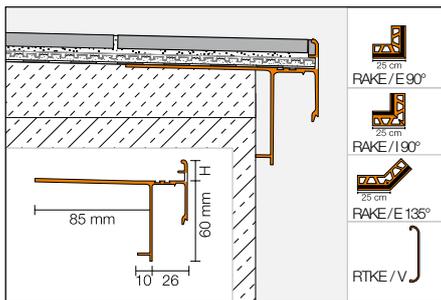

Installation of Schlüter®-BARA-RAKE

1. Select Schlüter-BARA-RAKE according to the tile thickness.
2. As a finishing profile, Schlüter-BARA-RAKE is embedded into the thin-bed mortar setting material with the trapezoid perforated anchoring leg aligned at the edge of the screed. Completely cover the anchoring leg with mortar.
3. Install Schlüter-KERDI over the anchoring leg and cover the undercut profile of the protruding adhesive flange of Schlüter-BARA-RAKE, using the sealing adhesive Schlüter-KERDI-COLL-L.
4. If using a trowel applied sealing compound, align the trapezoid perforated anchoring leg of Schlüter-BARA-RAKE in the waterproofing assembly at the exposed edge. The waterproofing material must cover the undercut profile of the protruding adhesive flange. Observe the installation instructions of the manufacturer for the installation of bonded waterproofing systems.
5. The bonded drainage membrane Schlüter-DITRA-DRAIN is adhered over the bonded waterproofing assembly. Make sure to continue the membrane to below the joint spacer integrated in the profile. It must be assured that the drainage space is not fully closed, including during the installation of the covering materials.
6. The system is now ready for the installation of tiles in the thin-bed method, observing the installation instructions of data sheet 6.2 Schlüter-DITRA-DRAIN. Maintain a proper joint between the tiles and the anchoring leg of Schlüter-BARA-RAKE, to be filled with elastomeric sealant.
7. Notes: Preformed parts are available for inside and outside corners. Abut the profile ends of Schlüter-BARA-RAKE, leaving a gap of approx. 5 mm to be covered with the clip on connectors. The applicable installation instructions and guidelines for the covering assemblies must be observed. All materials used in the assembly must be weather resistant, waterproof and suitable for outdoor areas.

Installation of Schlüter®-BARA-RAKEG

1. Select Schlüter-BARA-RAKEG according to the tile thickness.
2. As a finishing profile, Schlüter-BARA-RAKEG is embedded into the thin-bed mortar setting material with the trapezoid perforated anchoring leg aligned at the edge of the screed. Completely cover the anchoring leg with mortar.
3. Install Schlüter-DITRA, abutting the anchoring leg. The connection with the profile is established with the sealing band Schlüter-KERDI-KEBA. Use the sealing adhesive Schlüter-KERDI-COLL-L to attach the sealing band with an overlap of at least 5 cm on Schlüter-DITRA, covering the entire anchoring leg and overlapping the undercut profile of the protruding adhesive flange of Schlüter-BARA-RAKEG. The system is now ready for the installation of tiles in the thin-bed method, observing the installation instructions of data sheet 6.1 Schlüter-DITRA. Maintain a proper joint between the tiles and the anchoring leg of Schlüter-BARA-RAKEG, to be filled with elastomeric sealant.
4. If using a trowel applied sealing compound, align the trapezoid perforated anchoring leg of Schlüter-BARA-RAKEG in the waterproofing assembly at the exposed edge. The waterproofing material must cover the undercut profile of the protruding adhesive flange. Observe the installation instructions of the manufacturer for the installation of bonded waterproofing systems.
5. Notes: Preformed parts are available for inside and outside corners. Abut the profile ends of Schlüter-BARA-RAKEG, leaving a gap of approx. 5 mm to be covered with the clip on connectors. The applicable installation instructions and guidelines for the covering assemblies must be observed.
6. All materials used in the assembly must be weather resistant, waterproof and suitable for outdoor areas.

Notes

Schlüter-RAKE/-RAKEG requires no special maintenance or care. The powder coated surface of the aluminium profile is UV resistant and colour stable. Damaged visible surfaces can be restored with paint.



Product Overview

Schlüter®-BARA-RAKE

Colours: PG = pastel grey, GM = grey metallic

C/A = MyDesign by Schlüter-Systems

Supplied length: 2.50 m

Colours	PG	GM	C/A
H = 10 mm	•	•	•
H = 15 mm	•	•	•
H = 18 mm	•	•	•
H = 21 mm	•	•	•
90° corner	•	•	•
135° corner	•	•	•
90° inside corner	•	•	•
Connector	•	•	•

* RAL colour coating

Schlüter®-BARA-RAKEG


Colours: AG = anthracite grey, BW = brilliant white, GM = grey metallic, PG = pastel grey,

SB = black brown, C/A = MyDesign by Schlüter-Systems*

Supplied length: 2.5 m

Colours	AG	BW	GM	PG	SB	C/A
H = 4 mm	•	•	•	•	•	•
H = 10 mm	•	•	•	•	•	•
H = 15 mm	•	•	•	•	•	•
H = 18 mm	•	•	•	•	•	•
H = 21 mm	•	•	•	•	•	•
90° corner	•	•	•	•	•	•
135° corner	•	•	•	•	•	•
90° inside corner	•	•	•	•	•	•
Connector	•	•	•	•	•	•

* RAL colour coating

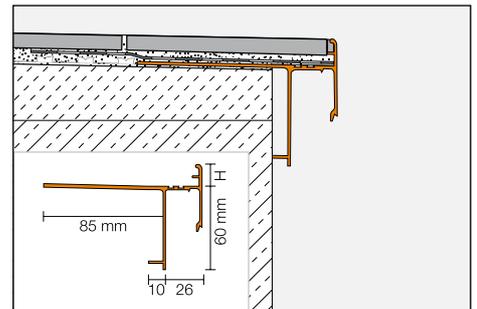

Assembly with Schlüter-DITRA and Schlüter-BARA-RAKEG



Schlüter-Systems KG  Schmölestraße 7 | D-58640 Iserlohn
 +49 2371 971-0  +49 2371 971-1111  info@schlueter.de  schlueter-systems.com

Schlüter-Systems Ltd  Units 3-6 Bardon 22 Industrial Estate | Bardon Hill | Coalville | Leicestershire | LE67 1TE
 +44 (0) 1530 813396  sales@schluter.co.uk  schluter.co.uk